TIP PROJECT: I–0914BB

CONTRACT: C203534

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	I–0914BB		

STATE PROJ. NO.	F. A. PROJ. NO.	DESCRIPTION
38688.1.1	IMS–085–4(117)224	P.E.
38688.1.2	IMS–085–4(117)224	R.O.W.
38688.3.FS3	IMS–085–4(117)224	CONST.

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

WARREN COUNTY

LOCATION: I–85 FROM NORTH OF SR 1237 (MANSON DREWRY ROAD) TO THE VIRGINIA STATE LINE

TYPE OF WORK: GRADING, DRAINAGE, PAVING GUARDRAIL, ITS AND STRUCTURES

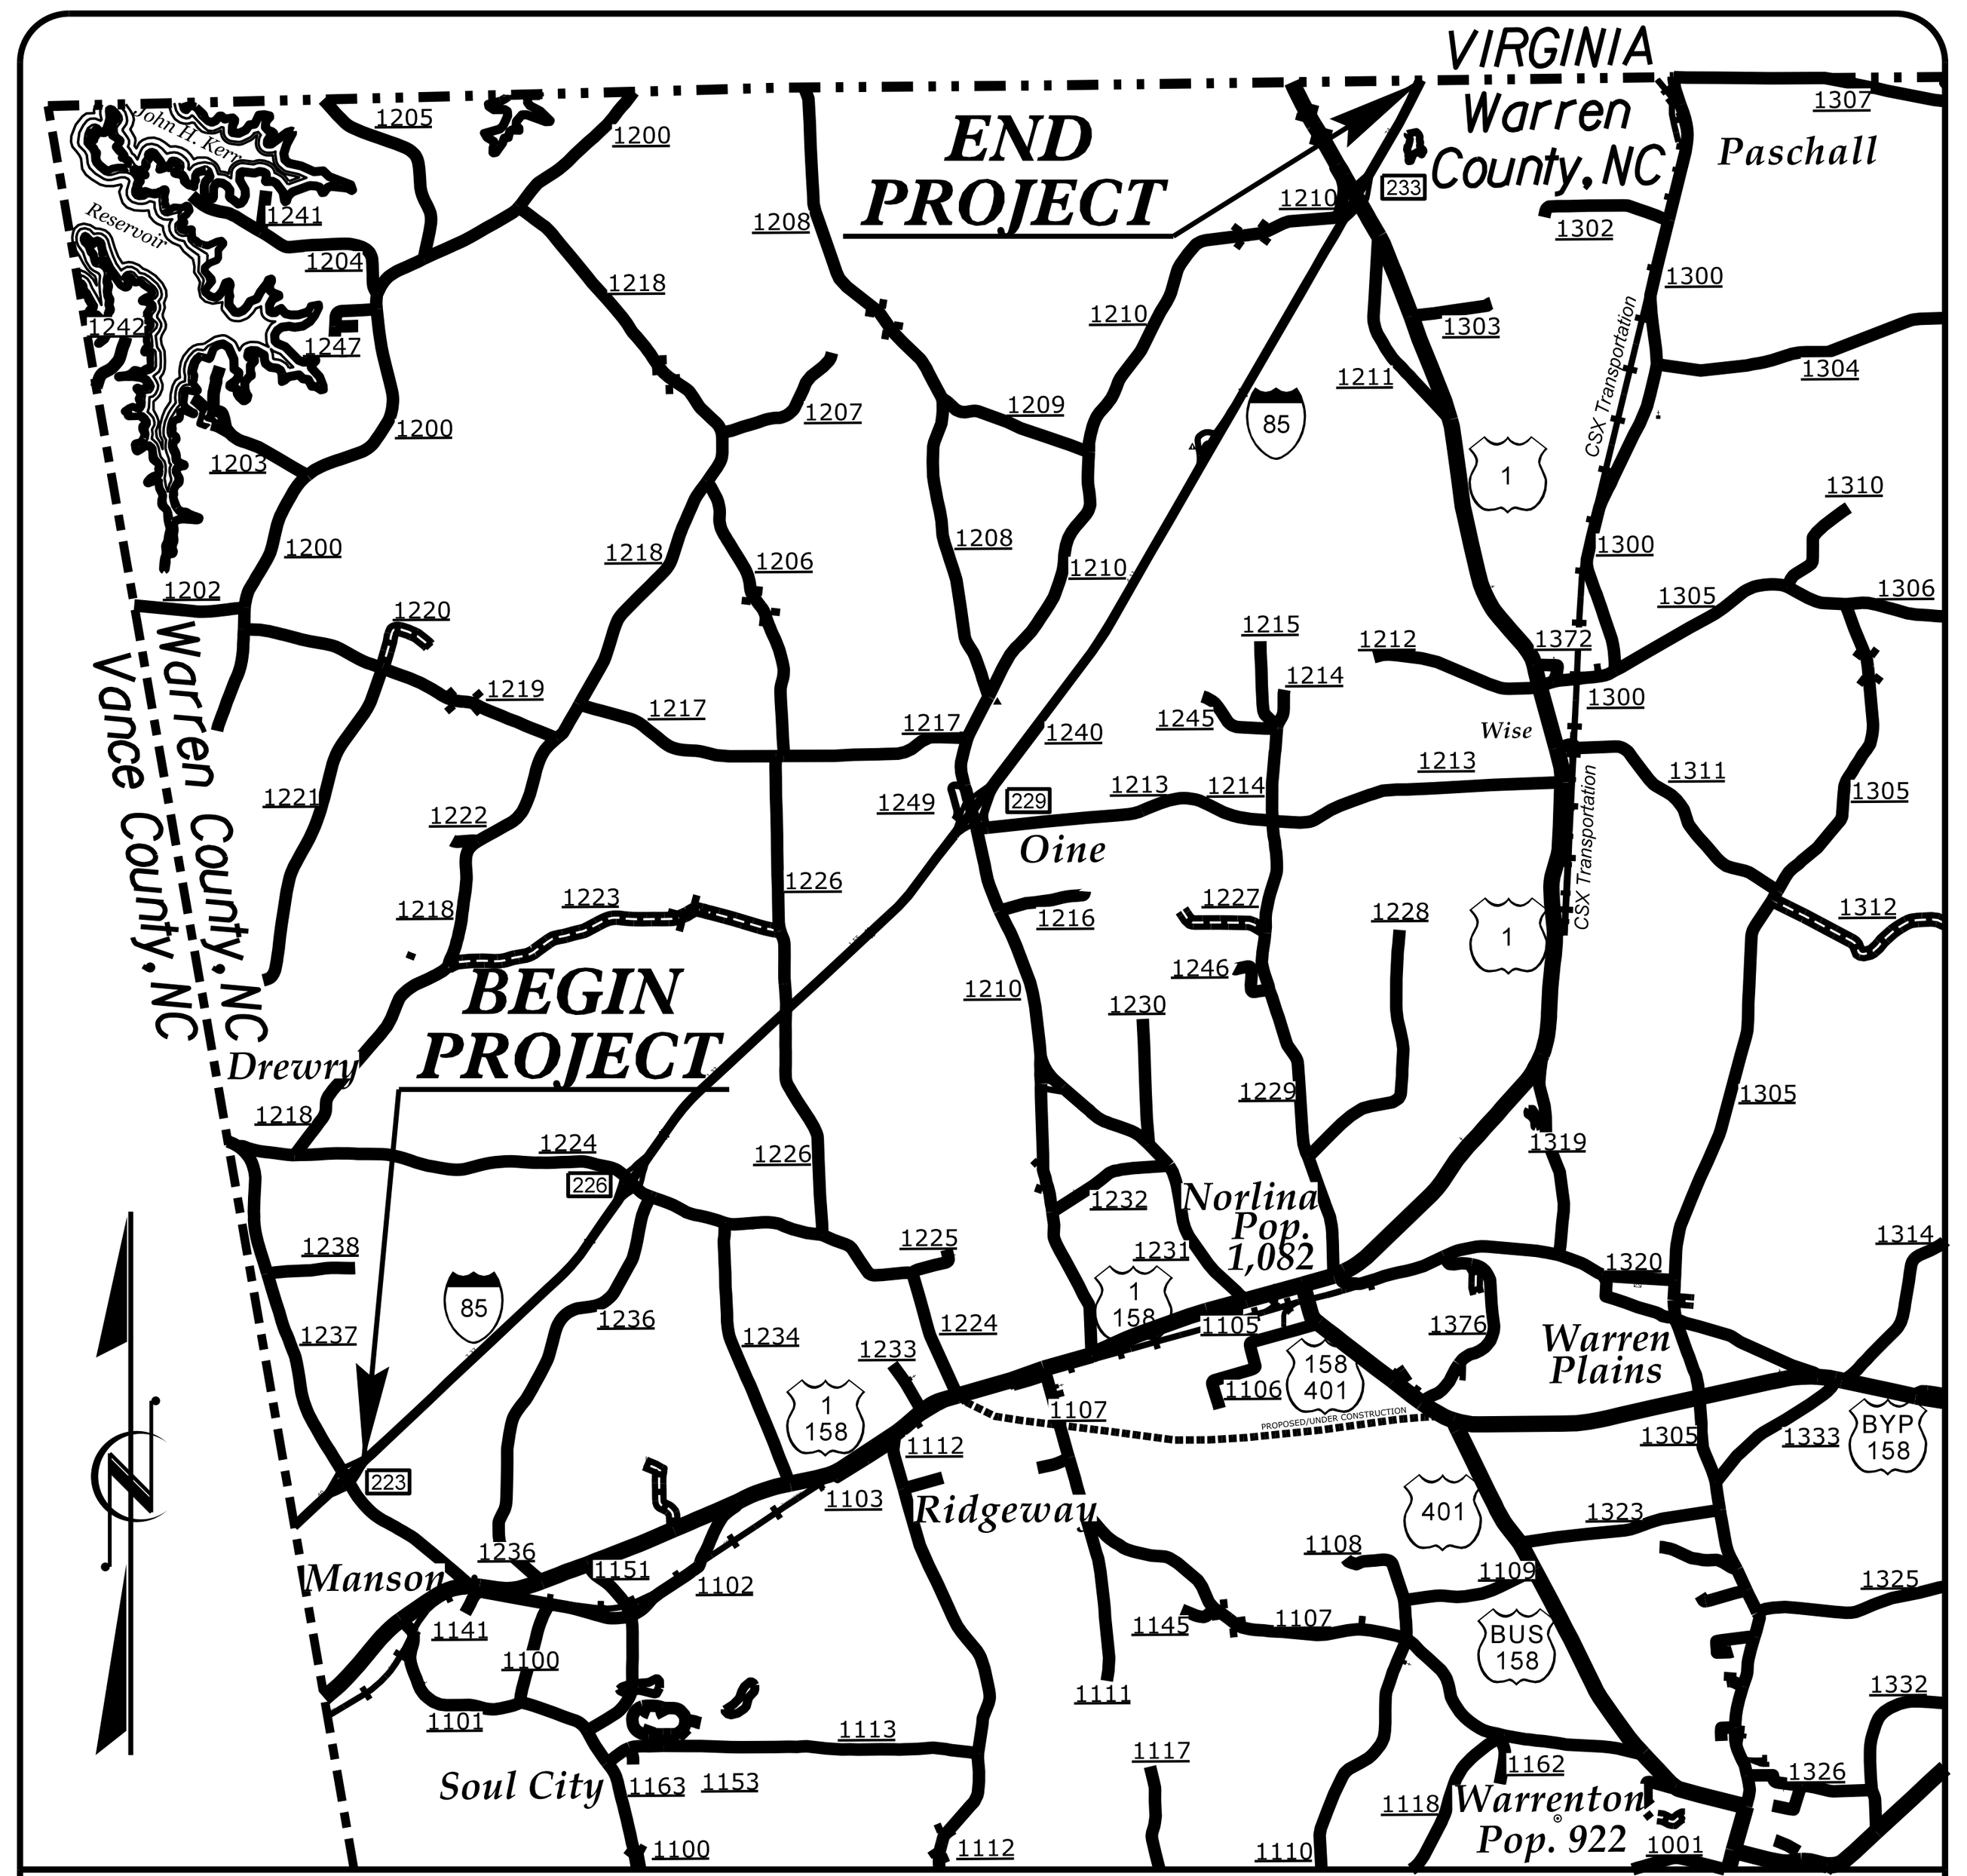

VICINITY MAP

NOTE: THIS PROJECT IS NOT WITHIN ANY MUNICIPAL BOUNDARIES

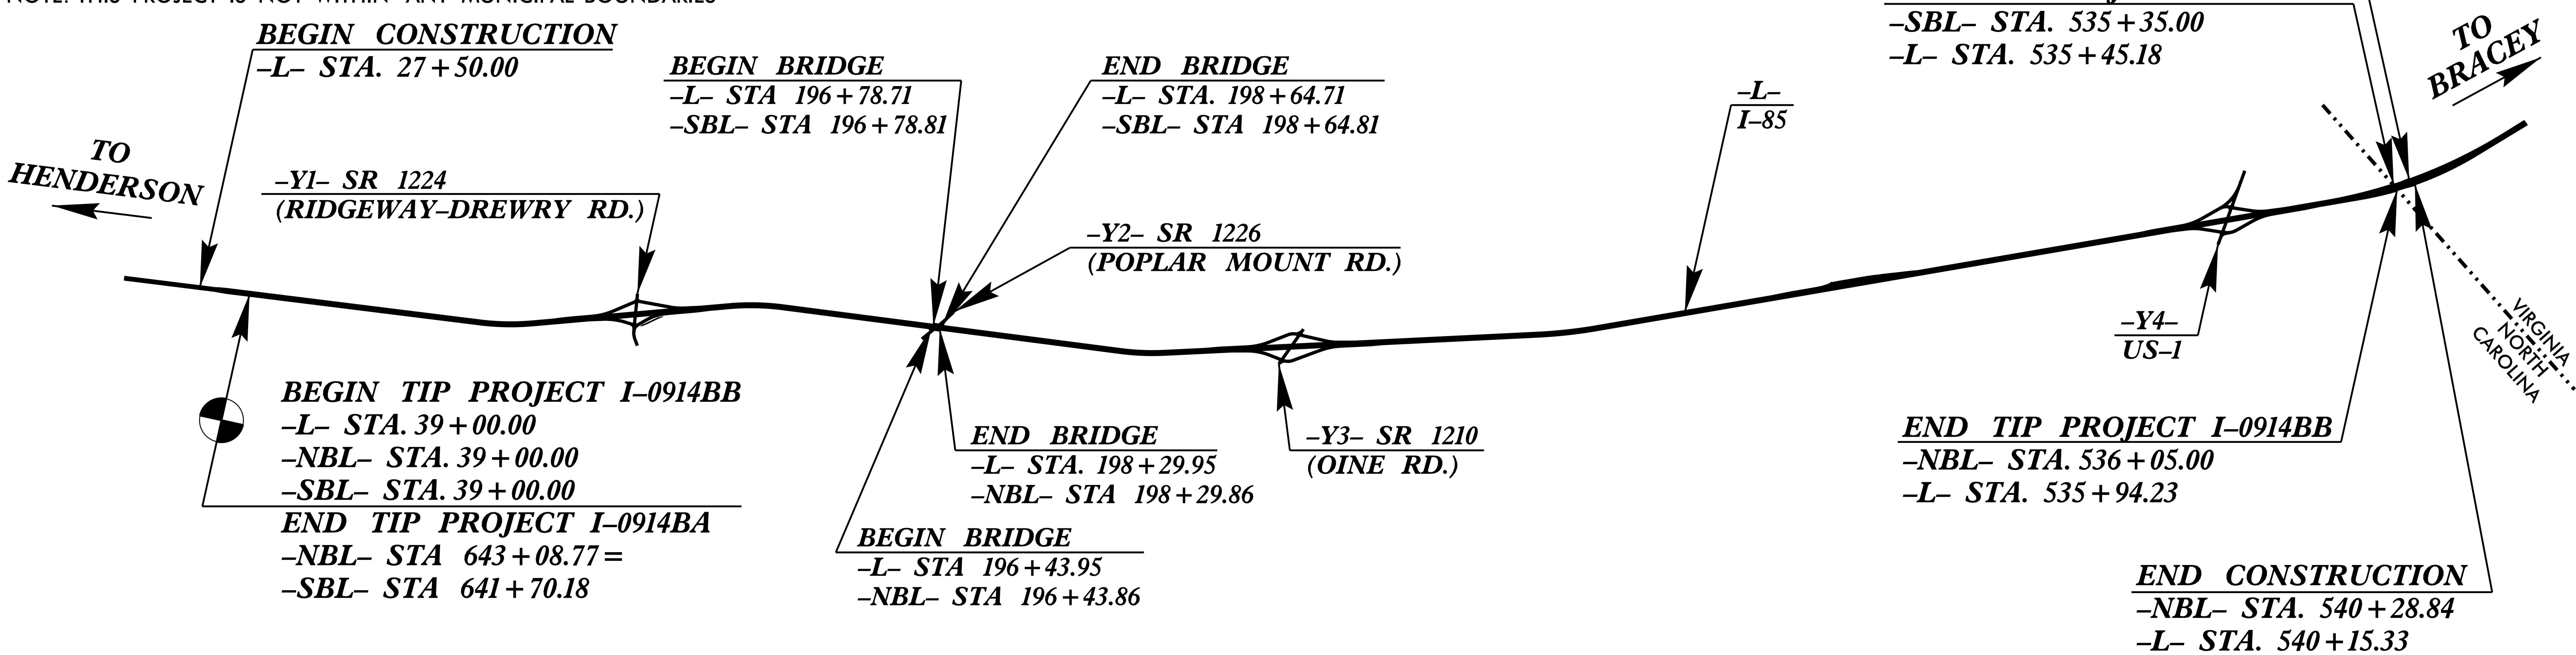

CLEARING ON THIS PROJECT SHALL BE PERFORMED TO THE ESTABLISHED BY METHOD III.
THIS IS A CONTROLLED–ACCESS PROJECT WITH ACCESS BEING LIMITED TO INTERCHANGES.

DESIGN DATA

ADT 2014 = 25,700
ADT 2035 = 41,600
DHV = 8 %
D = 55 %
T = 28 % *
V = 70 MPH
*TTST = 22% DUAL = 6%
FUNC CLASS =
INTERSTATE
STATEWIDE TIER

PROJECT LENGTH

LENGTH ROADWAY TIP I–0914BB = 9.375 MILES

LENGTH STRUCTURES TIP I–0914BB = 0.037 MILES

TOTAL LENGTH PROJECT TIP I–0914BB = 9.412 MILES

Prepared in the Office of:

DIVISION OF HIGHWAYS

1000 Birch Ridge Dr., Raleigh NC, 27610

2012 STANDARD SPECIFICATIONS

LETTING DATE:
MARCH 17, 2015

10-FEB-2015 10:52
$$$$$$$$$$$$$$DGN$$$$$$$$$$$$$$$$$$
dcrutcher