DocuSign Envelope ID: 4E8F443E-C9FC-4E9B-A9DF-A74F3DD5B889

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

TRANSPORTATION MANAGEMENT PLAN

WILSON COUNTY

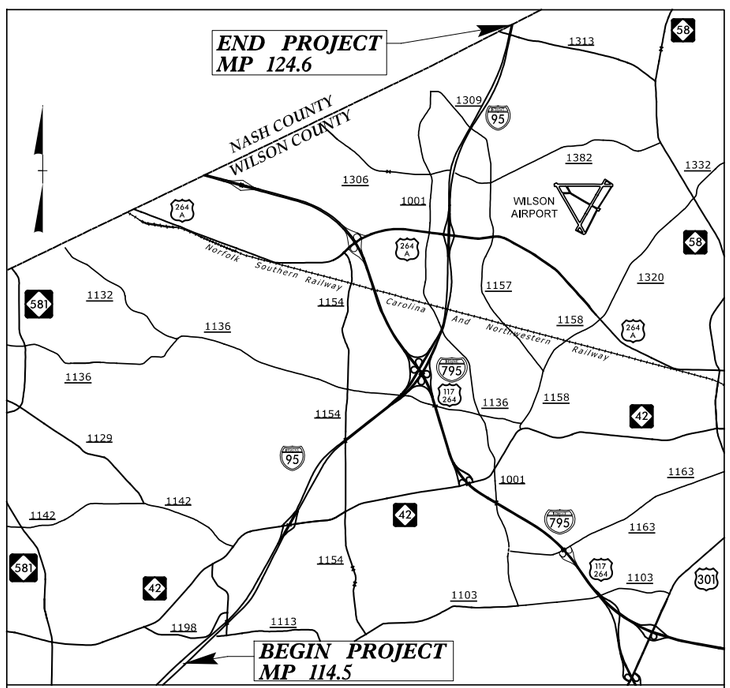

SKETCH MAP SHOWING THE VICINITY OF STATE PROJECT I-5727/I-5842

TEMPORARY PAVEMENT MARKING

PAINT (6")

WHITE EDGELINE
YELLOW EDGELINE
10 FT. WHITE SKIP
3 FT/9 FT WHITE MINISKIP

PAINT (12")

WHITE GORELINE
WHITE SOLID LANE LINE

PAINT (24")

WHITE STOP BAR

SYMBOLS & CHARACTERS

RIGHT TURN ARROW
COMBO STRAIGHT/LEFT ARROW
MERGE ARROW

TEMPORARY RAISED MARKERS

CRYSTAL & RED

TRAFFIC CONTROL DEVICES

BARRICADE (TYPE III)
LAW ENFORCEMENT
CHANGEABLE MESSAGE SIGN

TEMPORARY SIGNING

PORTABLE SIGN

INDEX OF SHEETS

SHEET NO.	TITLE
TMP-1	TITLE SHEET, VICINITY MAP, INDEX OF SHEETS, LIST OF APPLICABLE ROADWAY STANDARD DRAWINGS AND TEMPORARY PAVEMENT MARKINGS AND MARKERS
TMP-1A & 1B	TRANSPORTATION OPERATION PLAN (GENERAL NOTES, MANAGEMENT STRATEGIES, WZTC GENERAL REQUIREMENTS AND WZTC NARRATIVE)
TMP-2A	WORK ZONE "VARIABLE" SPEED LIMIT REDUCTION
TMP-2B	TYPICAL SIGNAL LOOP LOCATIONS
TMP-3	DETOUR FOR EXIT 119A-B I-95 NB CD AT US 264
TMP-4	DETOUR FOR EXIT 119A I-95 NB RAMP TO US 264E
TMP-5	DETOURS FOR EXITS 119B & 38B I-95 NB CD TO/FROM US 264W
TMP-6	DETOUR FOR EXIT 38B US 264W TO I-95 NB
TMP-7	DETOUR FOR EXIT 38B RAMP & CD US 264 TO I-95 NB
TMP-8	DETOUR FOR EXIT 119B-A I-95 SB CD AT US 264
TMP-9	DETOUR FOR EXIT 119B I-95 SB RAMP TO US 264W
TMP-10	DETOURS FOR EXITS 119A & 38A I-95 SB CD TO/FROM US 264E
TMP-11	DETOUR FOR EXIT 38A US 264E TO I-95 SB
TMP-12	DETOUR FOR EXIT 38A RAMP & CD US 264 TO I-95 SB

ROADWAY STANDARD DRAWINGS

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1101.01	WORK ZONE ADVANCE WARNING SIGNS
1101.02	TEMPORARY LANE CLOSURES
1101.03	TEMPORARY ROAD CLOSURES
1101.04	TEMPORARY SHOULDER CLOSURES
1101.05	WORK ZONE VEHICLE ACCESSES
1101.11	TRAFFIC CONTROL DESIGN TABLES
1110.01	STATIONARY WORK ZONE SIGNS
1110.02	PORTABLE WORK ZONE SIGNS
1115.01	FLASHING ARROW BOARDS
1130.01	DRUM
1135.01	CONES
1145.01	BARRICADES
1165.01	WORK VEHICLE LIGHTING SYSTEMS AND TMA DELINEATION
1180.01	SKINNY-DRUM
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - TWO-LANE AND MULTI-LANE ROADWAYS
1205.03	PAVEMENT MARKINGS - EXITS AND ENTRANCE RAMPS
1205.08	PAVEMENT MARKINGS - SYMBOLS AND WORD MESSAGES
1250.01	RAISED PAVEMENT MARKERS - INSTALLATION SPACING
1251.01	RAISED PAVEMENT MARKERS - PERMANENT AND TEMPORARY

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

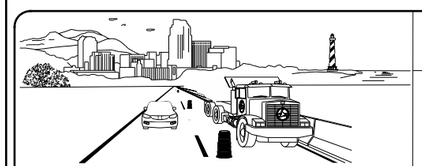

WORK ZONE SAFETY & MOBILITY
"from the MOUNTAINS to the COAST"

N.C.D.O.T. WORK ZONE TRAFFIC CONTROL
1561 MAIL SERVICE CENTER (MSC) RALEIGH, NC 27699-1561
750 N. GREENFIELD PARKWAY, GARNER, NC 27529 (DELIVERY)
PHONE: (919) 773-2800 FAX: (919) 771-2745

J.S. BOURNE, PE — STATE TRAFFIC MANAGEMENT ENGINEER
J.S. KITE, PE — TRAFFIC CONTROL PROJECT ENGINEER
D.A. PARKER — TRAFFIC CONTROL PROJECT DESIGN ENGINEER
S.B. JENNINGS — TRAFFIC CONTROL DESIGN ENGINEER

DIVISION OF HIGHWAYS · STATE OF NORTH CAROLINA · DEPARTMENT OF TRANSPORTATION · WORK ZONE TRAFFIC CONTROL

ICA Engineering
5121 Kingdom Way, Suite 100
Raleigh, NC 27607
NC License No: P0525

APPROVED: DocuSigned by: Michael T Rzepka 018C3480C26049D...
DATE: 12/10/2015

SEAL

SHEET NO.
TMP-1

I-5727/I-5842

TIP PROJECT:

12/10/2015
R:\15727_tmp_title.dgn
ICA Engineering