PROJECT REFERENCE NO.	SHEET NO.
U-3308	SCP.10

FIBER OPTIC CABLE

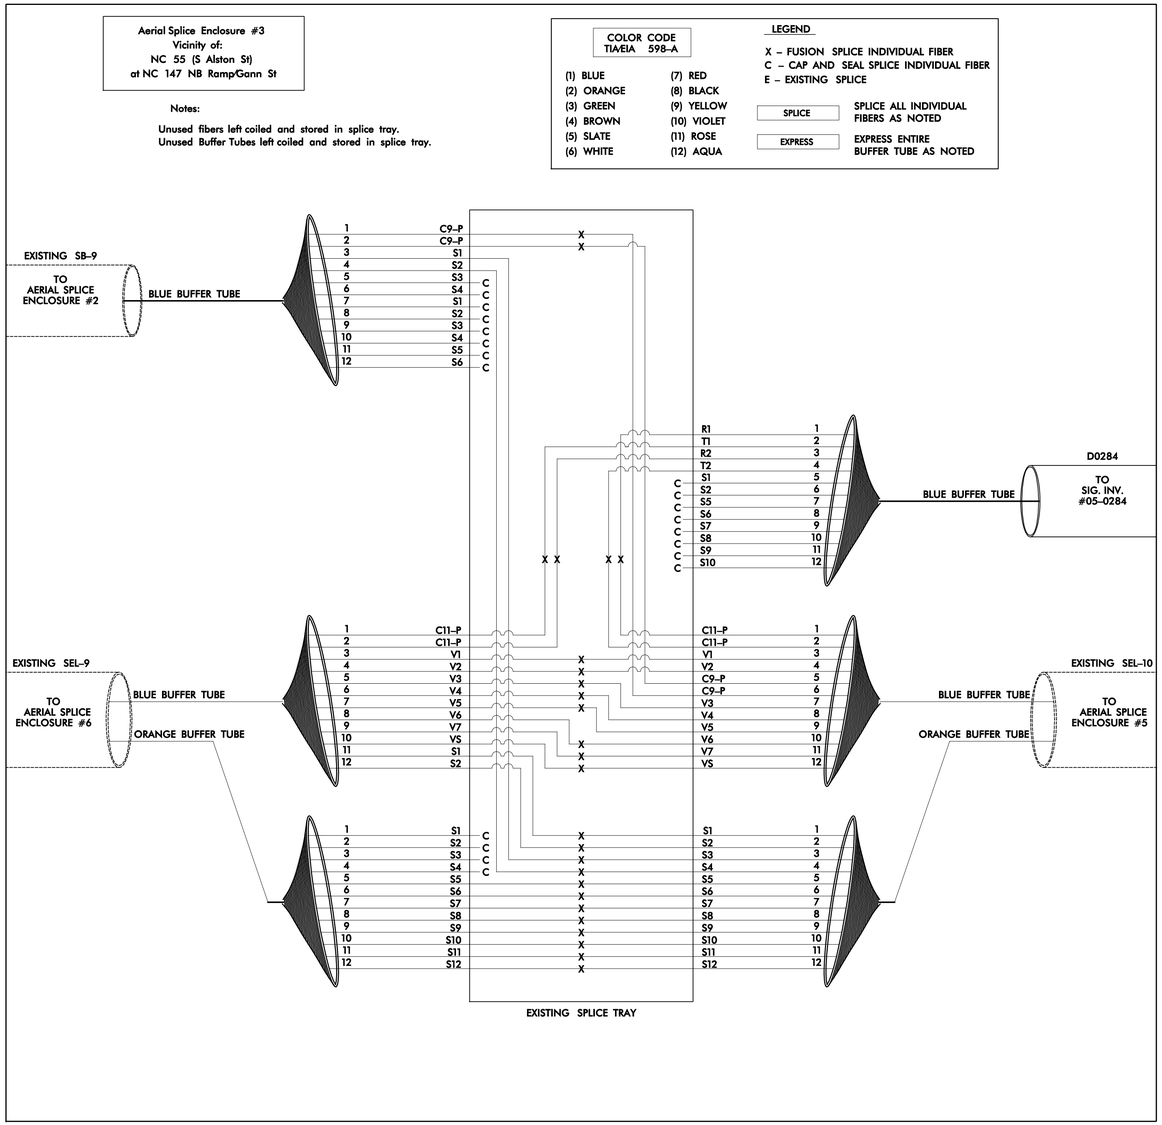

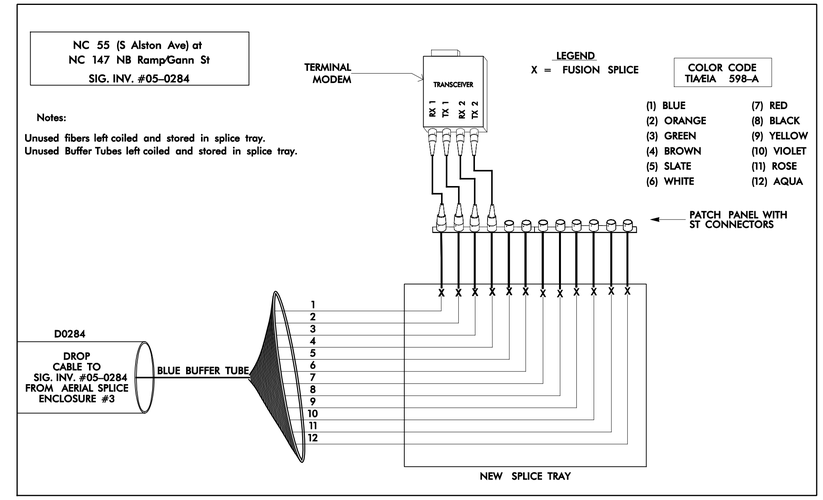

INCLUDE ON THE COVER OF EACH SPLICE TRAY THE FOLLOWING:
REFERENCE SECTION 1731 "FIBER OPTIC SPLICE ENCLOSURE"

1) SPLICE LOCATION
2) DATE
3) COMPANY NAME
4) NAME OF INDIVIDUAL PERFORMING THE SPLICING

PRIOR TO INSTALLING THE COVER ON THE SPLICE TRAY TAKE A DIGITAL PHOTOGRAPH SHOWING THE SPICE TRAY AND INFORMATION SHOWN ABOVE (1–4) AND SUBMIT PHOTOGRAPH ALONG WITH OTDR TEST RESULTS.

NOTE:
Aerial Splice Enclosure #4
OMITTED

SEPI ENGINEERING & CONSTRUCTION
1025 Wade Avenue
Raleigh, NC 27605
Tel:919-789-9977
Fax:919-789-9591
License #: C-2197

Prepared for the Offices of:
Transportation Mobility and Safety Division
STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
Signal Design Section
750 N.Greenfield Pkwy,Garner,NC 27529

SCALE
0
NTS

NC 55 (ALSTON AVE.)
SPLICE DETAILS

Division 5 Durham County Durham

PLAN DATE:	November 2014	REVIEWED BY:	J Hochanadel
PREPARED BY:	J Kopaskie	REVIEWED BY:	

REVISIONS	INIT.	DATE

SEAL
NORTH CAROLINA PROFESSIONAL SEAL 28430 ENGINEER JEFFREY W. HOCHANADEL
Docusigned by:
50781D2BF98C498...
SIGNATURE
12/22/2014
DATE
CADD Filename: -

12/17/2014
G:\Transportation\TR13.017.00 NCDOT 2012 Traffic LSA\TR13.017.03 (U-3308 Signals)\Traffic\Cable Routing\TIP U-3308 CABLE ROUTING PLANS\SCP9 thru SCP18.dgn
jkopaskie