DocuSign Envelope ID: 2B19B996-3EDC-4D2C-96D4-7C0AA4548E22

6/2/99

REVISIONS

PROJECT REFERENCE NO.	SHEET NO.
U-4906	RW20

Location and Surveys

Vaughn & Melton Consulting Engineers

- New Bern, North Carolina Phone: (252) 631-5115
- Middlesboro, Kentucky 40965 Phone: (606) 248-6600
- Asheville, North Carolina 28806 Phone: (828) 253-2796
- Charlotte, North Carolina 28217 Phone: (704) 357-0488

NORTH CAROLINA PROFESSIONAL LAND SURVEYOR SEAL L-4192 WILLIAM T. ROBBINS, II

I, William T. Robbins, II, a Professional Land Surveyor in the state of North Carolina hereby certify to the best of my knowledge and belief that the following work item(s) (Base map Compilation, R/W Staking) performed under my responsible charge meet NCDOT Survey Standards as directed in the NCDOT Location & Surveys guidelines and procedures.

I further certify that the data compiled came from available surveys/mapping performed by others and provided to me by NCDOT and do not certify to the accuracy or quality of the individual data sources.

I further certify that the right of way and permanent easement points shown herein and outlined in the tables shown hereon (localized coordinates, station/offset) have been checked and are accurate representations of the right of way and permanent easement points depicted on the corresponding highway plans. I also certify that the right of way and permanent easement points shown herein have been field monumented under my supervision from existing survey control provided by others; that the depicted property data shown herein were surveyed by others; and these monuments denote the right of way and easement boundaries at the time of staking which may be subject to change due to right of way revisions (See deeds for final determination).

Witness my original signature, registration number and seal this 17th day of August, 2021.

DocuSigned by: 2E405F2B0130468...

Professional Land Surveyor — PLS # L-4192 — Seal

NAD 83/ NSRS 2007

-L-

PIs Sta 251+62.52	PI Sta 257+10.56	PIs Sta 262+80.39
Θs = 1° 32' 54.7"	Δ = 9° 13' 51.5" (LT)	Θs = 1° 01' 50.8"
Ls = 300.00'	D = 1° 01' 56.5"	Θs = 6° 02' 20.7"
LT = 200.01'	L = 894.17'	Ls = 200.00'
ST = 100.01'	T = 448.05'	LT = 123.72'
	R = 5,550.00'	ST = 76.51'
	SE = EXISTING	

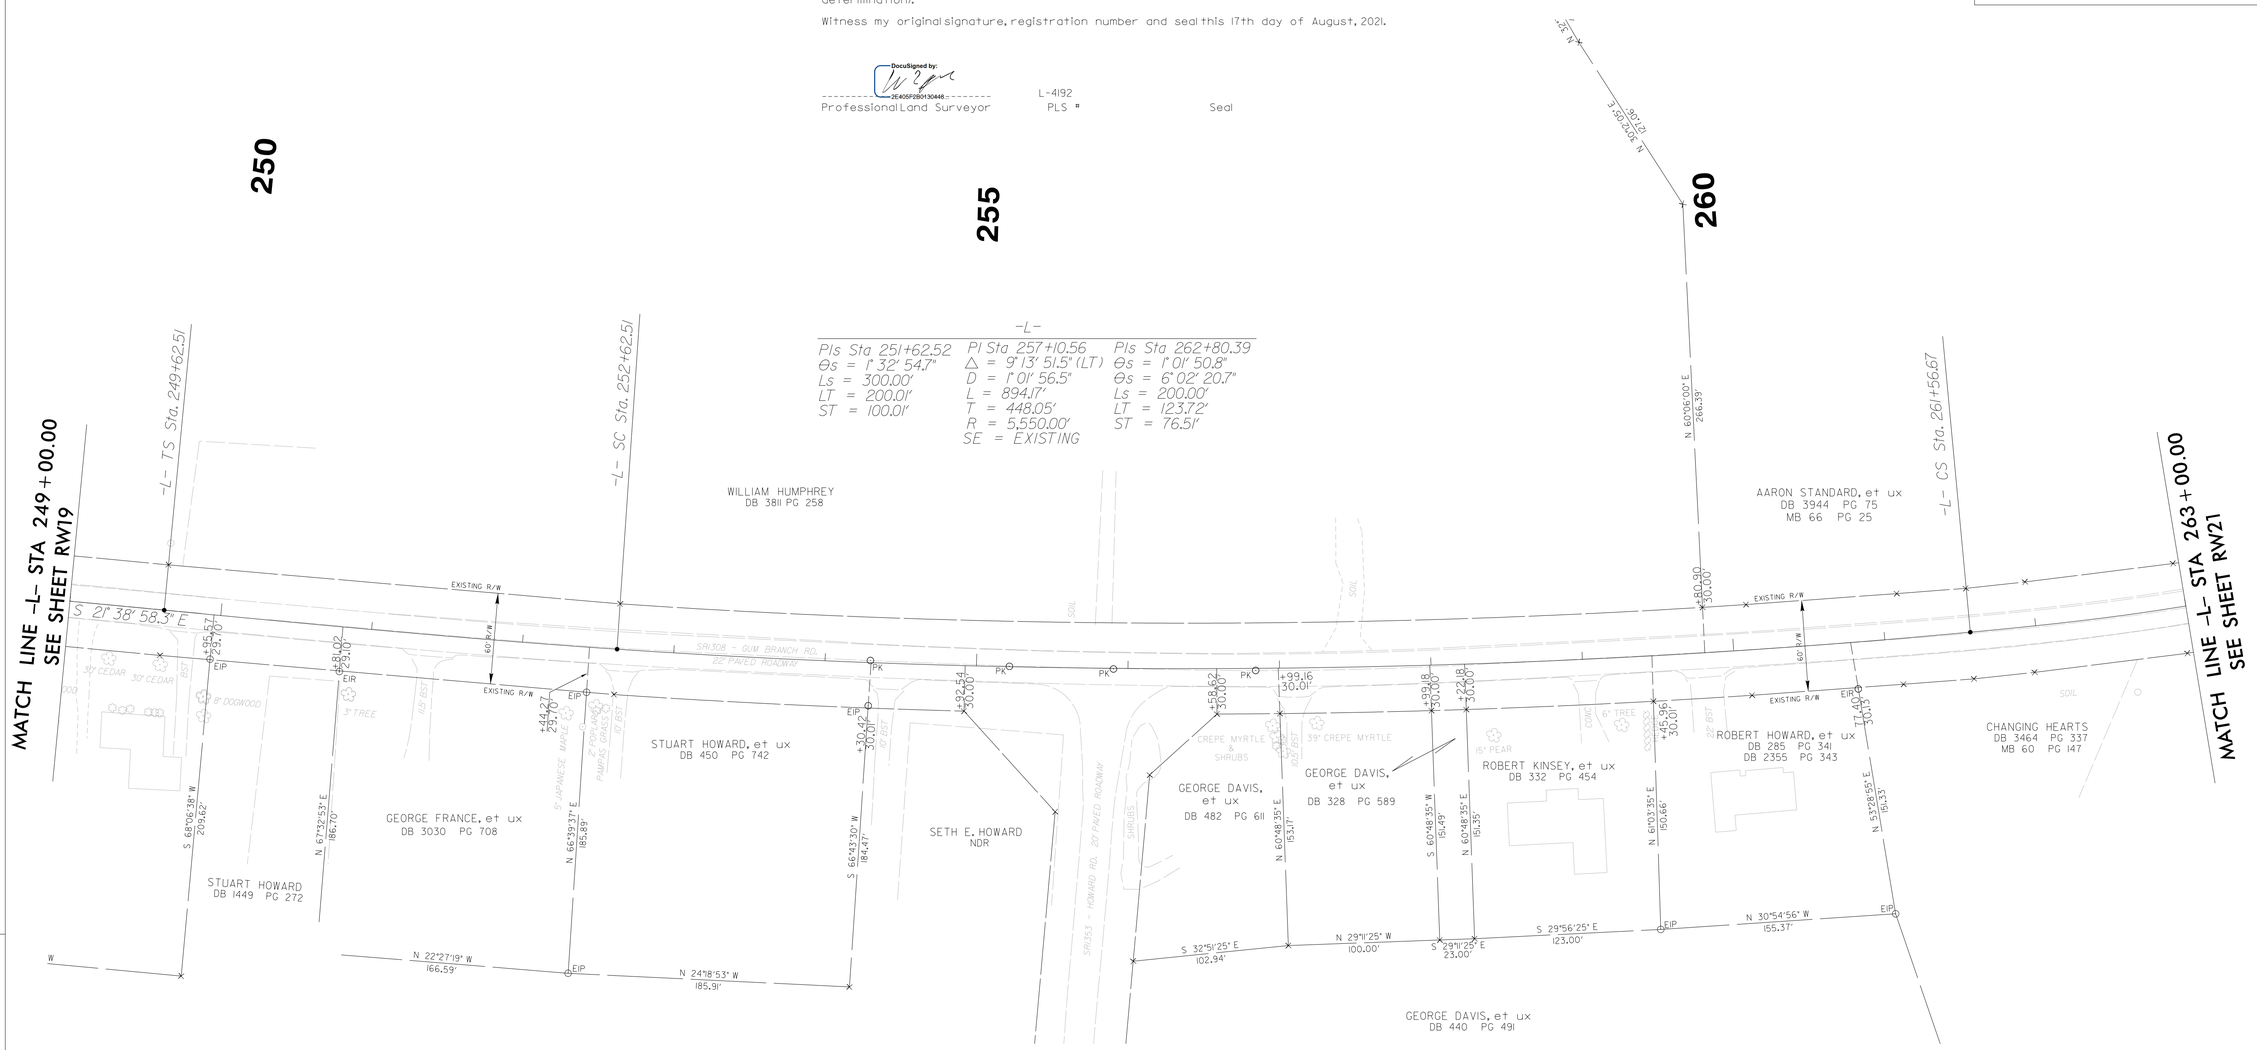

NOTES:

1. IF FURTHER INFORMATION REGARDING PROJECT CONTROL IS NEEDED PLEASE CONTACT THE LOCATION AND SURVEYS UNIT.

2. PROJECT CONTROL WAS ESTABLISHED USING GNSS, THE GLOBAL NAVIGATION SATELLITE SYSTEM.

6/21/2021 2:36:55 PM
U:\Data\Work\U4906_ls_rw20.dgn
User:bboyles